










Item 名称	Specification 规格
Clear-span width 篷房跨度	10m/12m/15m/20m
Eave height 屋檐高度	3m
Ridge height 屋脊高度	4.6m/5.2m/5.4m/6.2m
Roof pitch 屋面坡度	18°
Bay distance 单元间距	5m
Longest component 最长部件	5.5m/6.4m/7.9m/10m
Minimum tent length 最少起订	15m
Roof fixing 屋面固定	No limit/de 没有限制
Roof fixing 屋面固定	Bar tensioning 拉紧器
Main profile 主型材	166x88x3mm
Max. allowed wind speed 最高承受抗风	80km/hour 0.5kn/m ²
Eave/Ridge connection 屋檐/屋脊连接角	Hot-dip Galvanized steel insert 镀锌钢铁
Framework material 框架材料	Hard pressed extruded Aluminium 6061-T6 硬挤压铝合金 6061-T6 (13HW)
Cover material 屋面材料	Waterproof, fireproof (DIN4012 B1, M2), UVresistant 650-850g/m ² 防腐、防霉、抗紫外线、阻燃 (M2和B1) 等性能达到国际标准



Roof Beam, Upright Support, Gable pole
顶梁、立柱、端面柱子



Eave Purlin, Gable pole, Ridge Purlin
屋檐梁、端面柱子、屋脊梁



Intermediate Purlin
屋面方管




Eave tension rail
屋檐方管、屋面方管、屋脊方管




Optional accessories


- PVC window sidewalls PVC侧边围布
- Glass door units 玻璃门
- Anchoring 膨胀螺丝
- Transparent PVC cover and sidewall 透明PVC墙和墙壁
- Rain Gutter 雨水槽
- Flooring system 地台
- Lining and curtain 窗帘和围幔
- Weight plate 称重盘
- Hard walling system 硬体墙系统
- Glass walling system 玻璃墙系统




ridge head connection
屋脊链接




eave corner
屋檐连接角




baseplate at the bracing connection
立柱、底座、斜支撑链接



eave corner
屋檐连接角



baseplate (field)
底座

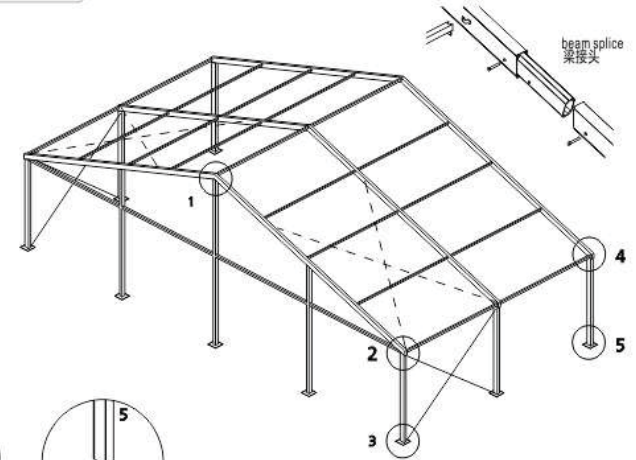

beam splice
梁接头